

DOUBLE CONE BLENDER :



Description :


It is composed of two truncated cones joined together by cylindrical section. A tight closing lid of the fast closing type for feeding material and a discharge butterfly valve at the other end of the unit which also renders a perfect tightness. "The working capacity of the Blender is 65% of total volume" The blender is recommended preferably when the product to be mixed have a similar density and particular size as well as no lumping properties. Baffle are provided in bigger unit for intense mixing.

The blending time is around 10 to 20 minutes (approx) as a maximum.

* Models available from capacity 5 Ltrs to 6000 Ltrs
(Higher capacities on request)

Technical Data:

GROSS CAPACITY IN LTRS		15	75	100	300	1000	1250	1500
MOTOR	HP	0.5	1	2	3	7.5	10	10
	RPM	1440	1385	1400	960	1440	1440	1440
FINAL SPEED RPM (approx)		20	15	15	15	10	8	8
OVER ALL DIMENSIONS ARE IN MM (approx)	A	710	1270	1550	1840	2950	2650	2650
	B	1080	1420	1340	2035	2070	2650	2775
	C	730	1005	925	1290	1400	1750	1800

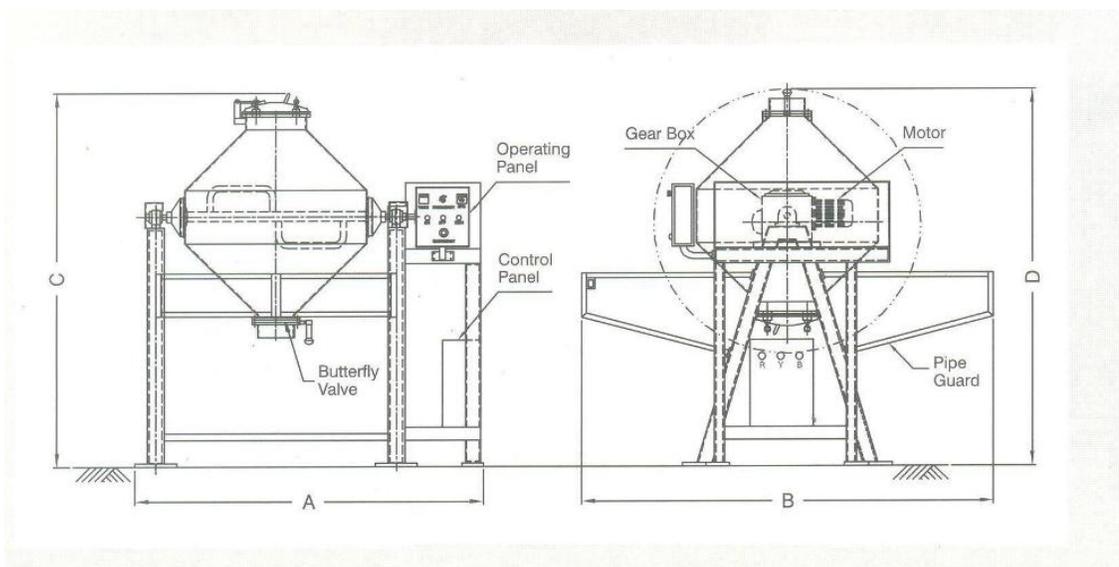

Note : Images Shown here are illustrative. As the design & manufacturing of Machines are subject to improvement, the product supplied will be as per our Techno-Commercial offer.